

HDL

Visit Our Web
Scan Here



The products can help
you accomplish your
goals with precision
and reliability.

EMKO ESM-4920

EMKO Electronic provides a range of electronic products used in process-control applications. Their products include programmable multi function process-control instruments, counters, and time-relays.

More Info: info@hdlhdl.com.sg | +65 9109 6008


HDL




ESM-4920

PID Temperature Controller with Universal Input (TC, RTD)

- Universal process input (TC,RTD)
- Self-Tune (Step Response Tuning) automatic adaptation of the coefficients to the system
- 2 Relays and 1 SSR drive output
- Soft Start Output For Resistance Durability
- 4 Digits process (PV) and 4 Digits set value (SV) display
- Configurable ON/OFF, P, PI, PD, and PID control forms
- Programmable Heating or Cooling Functions for Control Output
- Alarm Functions for Alarm Output
- SET Value Limitation For System Protection
- Sensor Break Protection



Connection Diagram

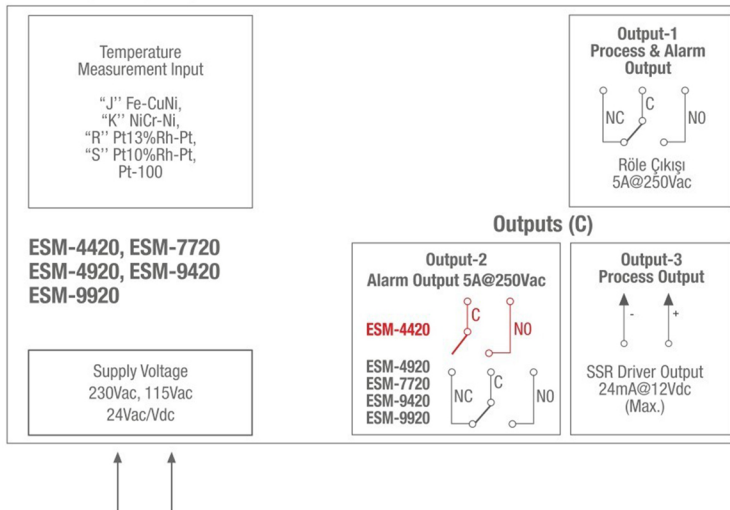



PID Temperature Controller

Features	Descriptions
Physical Features	
Dimensions	96 mm x 48 mm x 94.5 mm
Protection Class	NEMA 4X (IP65 at front, IP20 at rear)
Installation	Fixed Installation
Storage / Operating Temperature	-40°C to +85°C / 0°C to +50°C
Storage / Operating Humidity	90 % max. (None condensing)
Electrical Features	
Supply Voltage and Power	230 Vac (+%15) 50/60 Hz. 1.5 VA 115 Vac(+%15) 50/60 Hz. 1.5 VA 24 Vac(+%15) 50/60 Hz. 1.5 VA 24 Vac/dc (+%15, +%10) 50/60 Hz. 1.5 VA
Sensor Inputs	J, K, R, S, T (IEC584.1) (ITS90) Selectable from parameters PT-100 (IEC751) (ITS90)
Optional Sensor Inputs	
Scale	Fe CuNi -200°C,900°C NiCr Ni -200°C,1300°C Pt13%Rh 0°C,1700°C Pt10%Rh 0°C,1700°C Cu CuNi -200°C,400°C PT 100 -200°C,650°C PT 100 -199.9°C,650.0°C
Accuracy	± % 0.25 of full scale for Thermocouple and Thermoresistance
Output	
Relay Output	5A@250 Vac at resistive load 5A@250 Vac at resistive load (Alarm Output)
SSR Output	Maximum 20 mA @ 12 Vdc
Analogue Output	
Optional Outputs	
Control	
Control Form	Programmable On / Off, P, PI, PD, and PID
Reading Frequency	3 readings per second
Communication Protocols	
Approvals	GOST-R, CE

HDL Company

Head Office: 1 Irving Pl, #05-08
The Commerze @Irving,
Singapore 369546

Phone:

+65 9109 6008
+65 6748 0535

Email:

info@hdlhdl.com.sg
sales@hdlhdl.com.sg